

**REMKO RTH080**  
**Hi-Pressure Trash Pump**



# REMKO RTH080

Remko RTH Series Pumps are an economical solution to high volume/high head self priming applications. Robust construction with innovative hydraulic design provides the stamina for handling solids laden liquids with ease.

Dependable self priming performance makes the RTH Series Pumps ideally suited for industrial applications including mine dewatering, trade waste, metal and timber mills, road construction, food and chemical processing plants.



The Remko RTH080 Hi-Pressure Trash Pump

## PUMP SPECIFICATIONS

### SPECIFICATIONS

**Maximum outside dimensions.** 667mm x 432mm x 687mm (length x width x height)

**Weight.** 222 kilograms

**Impeller diameter.** 279.4 millimetres

**RPM.** From 850 to 2150 RPM

**Solids.** 20 millimetres maximum

### SELF PRIMING SPECIFICATIONS

850 RPM - 2.3 metres. 1150 RPM - 2.9 metres. 1450 RPM - 4.5 metres.


1750 RPM to 2150 RPM - 7.6 metres.

Confirm NPSH before using Curve.

*Note: Specifications may change without notice*

## PERFORMANCE CURVE

The Performance Curve indicates Total Metres Head vs Flow Rate

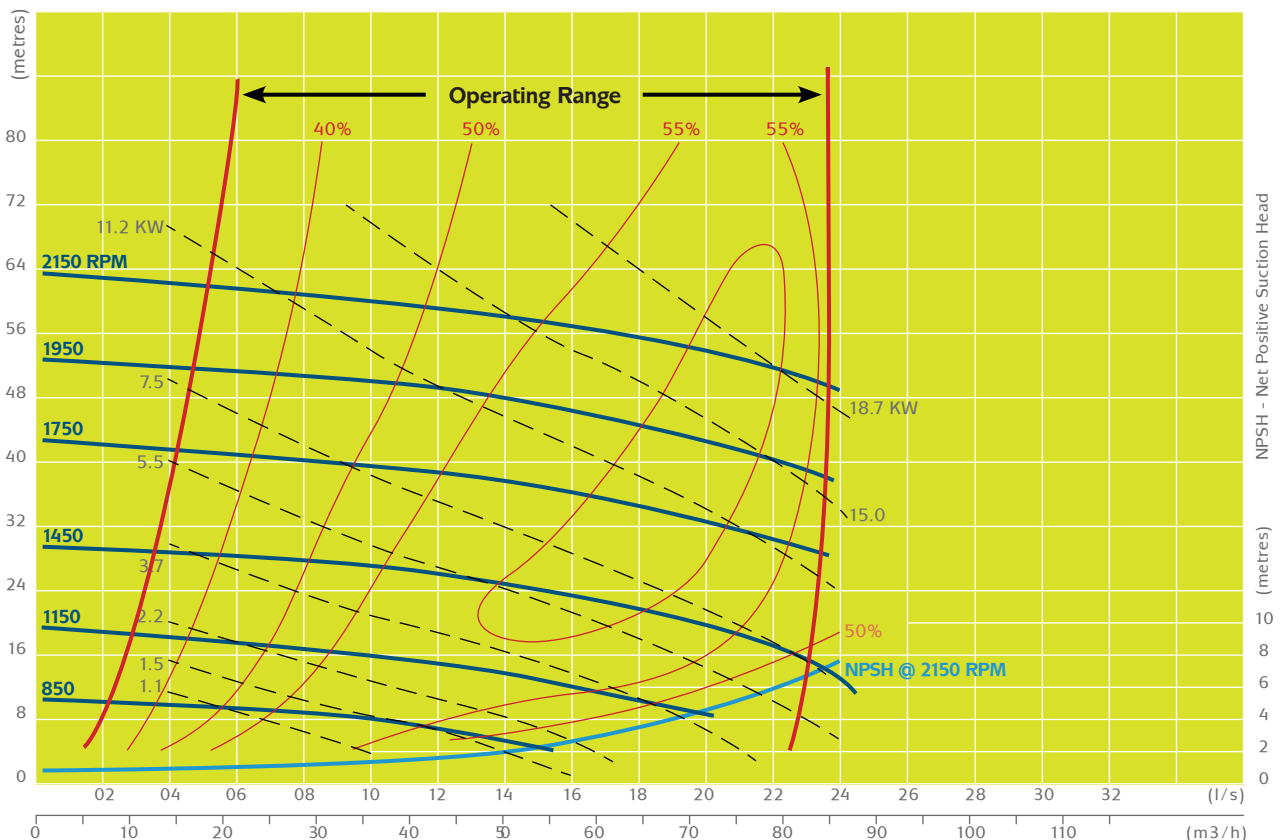

# OUTSIDE DIMENSIONS RTH080

80mm ANSI 150

69.8

Pump dimensions may change  
without notice  
All dimensions in millimetres

80mm ANSI 150

Ø 17.5mm

686.8mm

394.0mm

431.8mm

292.1mm

431.8mm

Maintain distance of 420mm to  
remove the Rotating Assembly

103.1

Ø 38.1



190.5mm

76.2

228.6mm

282.9mm

666.8mm

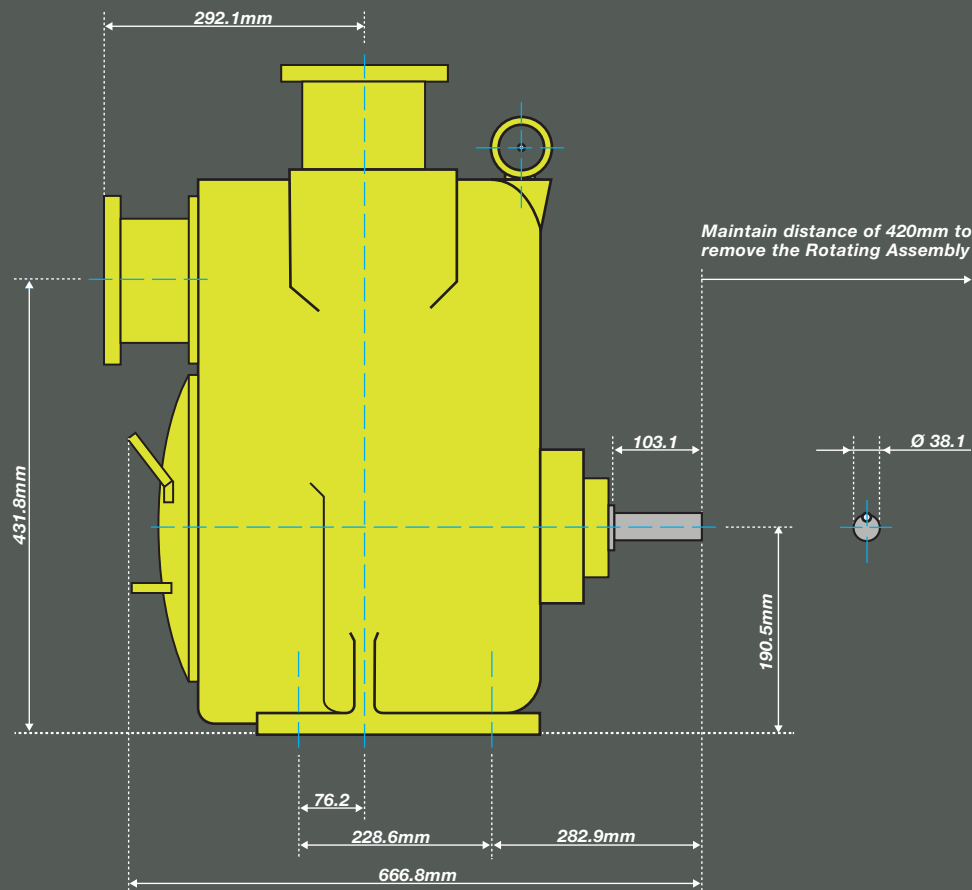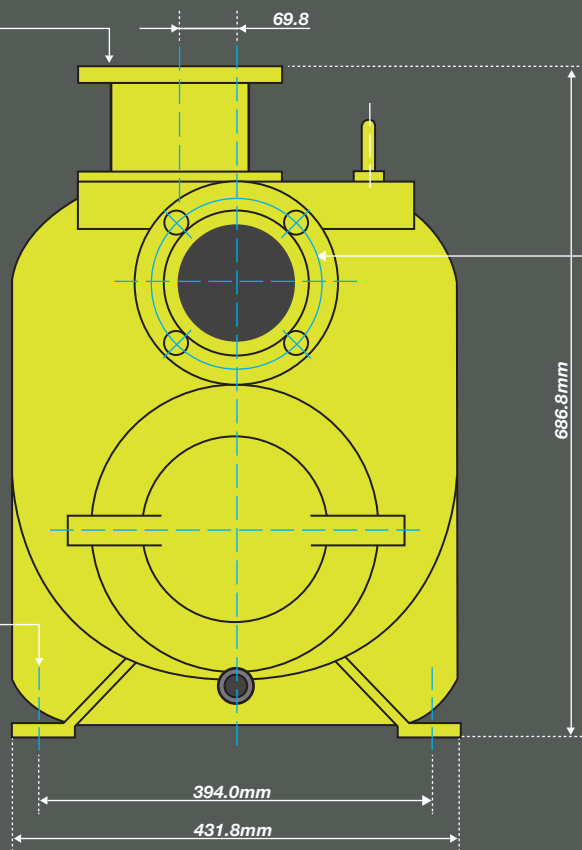



*Contact your local Remko Distributor*

*Remko 1800 333 424*