

RS Series Submersible Pumps

*Advanced design for smooth
efficient operation*



Remko



SOLID REPUTATION, PROVEN PERFORMANCE

Remko is the product of 30 years manufacturing and development expertise. With commitment to excellence in product quality and engineering, customer satisfaction and market knowledge, Remko offers trustworthy solutions for all aspects of wastewater, sewage and clean water pumping.

QUALITY GUARANTEED

Every pump is subjected to stringent quality, precision and performance testing throughout production. On successful completion the pumps are issued with a host of international quality and safety certifications including ISO 9001 / ISO 9002.

CUSTOMER SUPPORT

Our dedicated sales and service team support distributors in all states, and work closely with customers to ensure success is achieved.

SERVICE AND BACK UP

Remko is supported by a complete line of spare parts and accessories to keep you pumping at peak efficiency.

REMKO
A NAME YOU CAN TRUST

The Remko Advantage	4-5
Drainage Pump	6-7
Vortex Pump	8-9
Sewage Cutter Pump	10-11
Sewage Grinder Pump	12-13
Single Channel Pump	14-15
316 Stainless Steel Pump	16-17
Dewatering Pump	18-19
Amphibious Pump	20-21
Axial Flow Pump	22-23
Dimensions	24-25
Spare Parts & Back Up Service	26
Accessories	27

IMPELLER DESIGN OPTIONS



RSD DRAINAGE

Multi-vane semi-open impeller



RSV VORTEX

Non-clog Vortex impeller



RSC CUTTER

Single vane semi-open impeller with a tungsten carbide cutting blade



RSG GRINDER

Stainless steel grinder mechanism hardened to Rockwell 60C



RSM MONO-CHANNEL

Non-clog high volume channel impellers



RSA IMPELLER

Closed multi-vane impeller



RSX IMPELLER

Axial and mixed flow impellers

THE REMKO ADVANTAGE

Remko is the tough solution for submersible pumping. Engineered to last and developed for the most demanding applications, Remko is relied on in a wide range of industrial, processing, mining, municipal and building service installations.

MOST COMPREHENSIVE

Remko offers the most comprehensive line of pumps relative to its market. An ideal selection is available for all your submersible pumping requirements.

AVAILABILITY, COMPETITIVE, RELIABILITY

Remko will add value to your business through full range availability, competitive pricing and product reliability.




RSVC.80.37.3.4

Auto Coupling Set Up



Solid Reputation... Solid Construction.

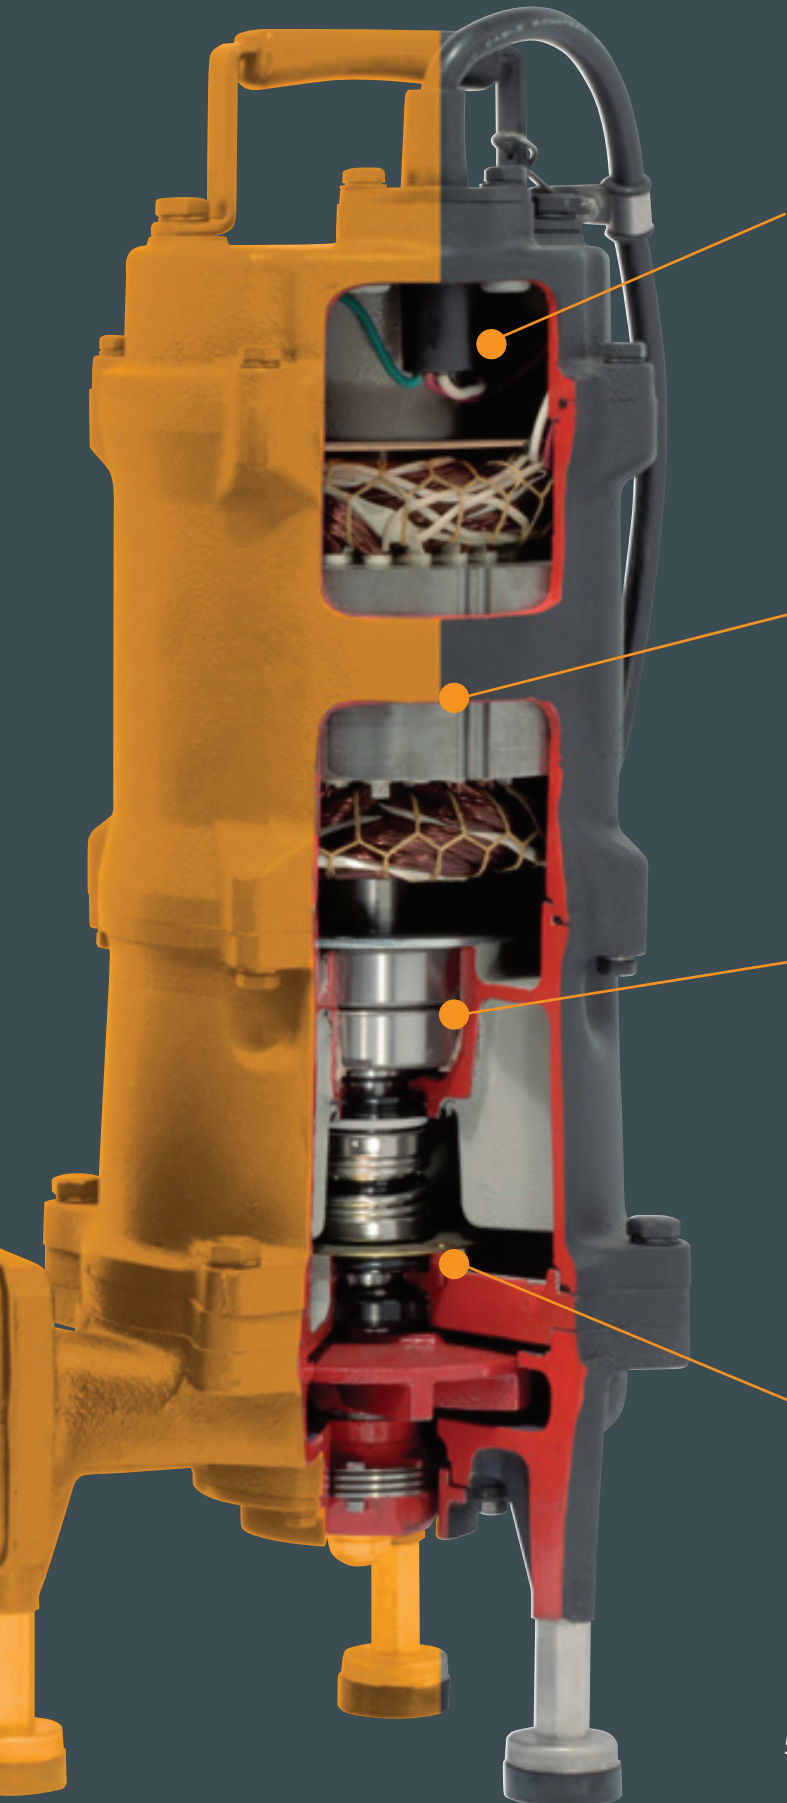

MOULDED CABLE BASE

Each core has been partially stripped, then encapsulated within epoxy resin – this combined with an additional grommet and o’ring seals provide the best protection against water ingress through the cable.



HEAVY RIGID SHAFT

Designed for maximum strength and rigidity. Reduces vibration and increases efficiency, seal and bearing life.



HEAVY-DUTY BEARINGS

Double row (some models) greased for life ball bearings for maximum durability and extended life.



TRIPLEX SEAL SYSTEM

Combines a double mechanical seal in a large capacity oil chamber and an additional protective lip seal. Anti-swirl vanes ensure consistent seal lubrication.



DrainagePump



RSD.50.075



RSDC.100.55

STORMWATER
SHOPPING CENTRES
COMMERCIAL BUILDINGS
BASEMENT CARPARKS
INDUSTRIAL PROCESS



RSD.80.22



DrainagePump



*For drainage of liquids
with small solids in suspension*

Remko Drainage Pumps are keeping basements dry, carpark drained and industry in production. These tough performers are built to the highest standard to guarantee a lasting investment.


Max Head: 33m

Max Flow: 23 l/sec

FEATURES

- Automatic versions available in 240v & 415v
- Heavy-duty construction
- Triplex seal system
- Thermal motor protection

PERFORMANCE CURVES

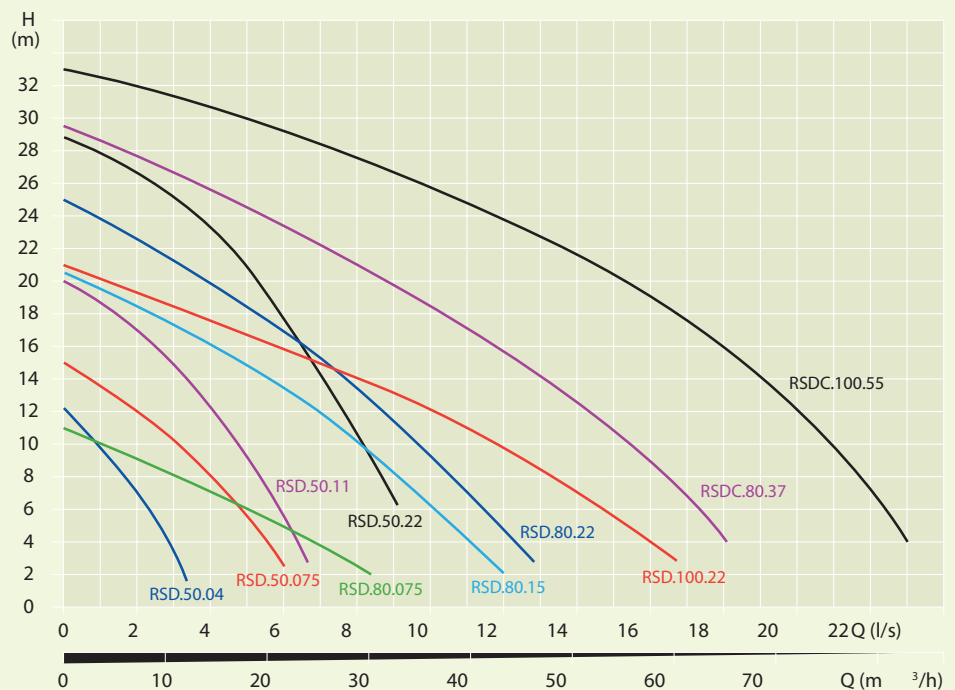


SPECIFICATIONS

Pump Model	Automatic option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSD.50.04	240v	50	0.4	2.6	-	2900	5	12
RSD.50.075	240v & 415v	50	0.75	4.8	1.8	2900	10	19
RSD.50.11	-	50	1.1	7.0	2.5	2900	8	24
RSD.50.22	-	50	2.2	14.1	4.7	2900	11	42
RSD.80.075	240v	80	0.75	5.3	1.9	2900	10	21
RSD.80.15	240v	80	1.5	9.2	3.4	2900	11	44
RSD.80.22	-	80	2.2	14.1	4.7	2900	11	47
RSDC.80.37	-	80	3.7	-	7.8	2900	16	60
RSD.100.22	-	100	2.2	-	4.7	2900	11	47
RSDC.100.55	-	100	5.5	-	11.8	2900	20	98



Vortex Pump



Industrial and commercial wastewater applications containing soft or fibrous solids



RSV.50.075



RSV.50.04



RSVC.80.22

COMMERCIAL
KITCHENS AND
RESTAURANTS

WASHDOWN AREAS

WASTE TREATMENT
FACILITIES

LAUNDRIES

ABATTOIRS



RSVC.80.37

Remko Vortex Pumps are the ideal solution for pumping liquids with soft or fibrous solids in suspension. From residential dwellings to demanding industrial processes, Remko Vortex Pumps perform quietly and solidly every day.

Max Head: 22m



Max Flow: 37 l/sec

FEATURES

- Automatic versions available in 240v & 415v
- Non-clog impeller
- Heavy-duty construction
- Triplex seal system
- Thermal motor protection



PERFORMANCE CURVES

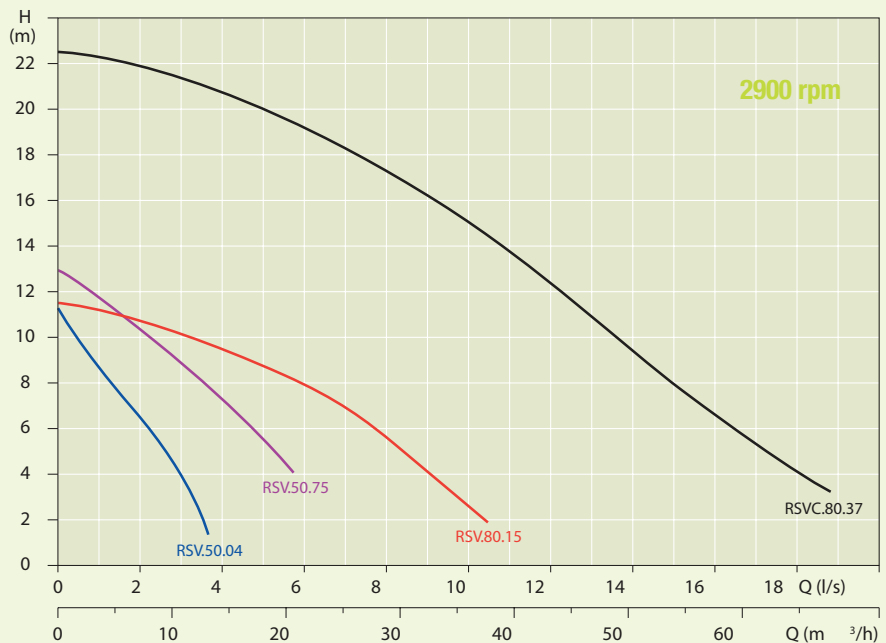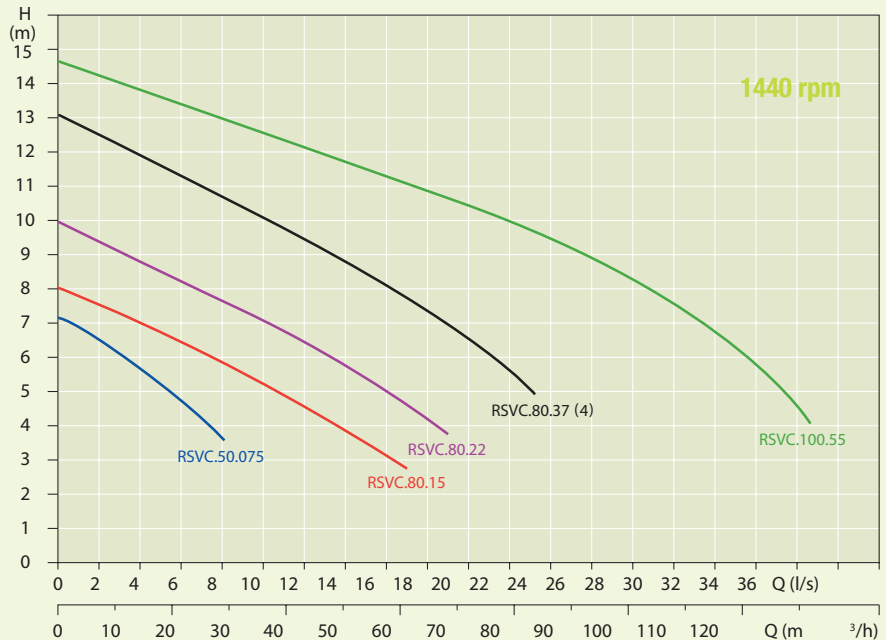

SPECIFICATIONS

Pump Model	Automatic option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSV.50.04	240v	50	0.4	2.6	-	2900	25	12
RSV.50.075	240v & 415v	50	0.75	5.0	1.9	2900	35	18
RSVC.50.075	-	50	0.75	-	2.0	1440	50	27
RSV.80.15	240v	80	1.5	9.2	3.4	2900	20	45
RSVC.80.15	-	80	1.5	-	3.9	1440	76	60
RSVC.80.22	-	80	2.2	-	5.3	1440	76	73
RSVC.80.37	-	80	3.7	-	7.8	2900	56	58
RSVC.80.37(4)	-	80	3.7	-	8.4	1440	76	80
RSVC.100.55	-	100	5.5	-	11.8	1440	65	139



Sewage Cutter Pump



RSC.50.075



RSC.80.22

WASTE
TREATMENT
FACILITIES
TRADEWASTE
EFFLUENT
SEWAGE





Sewage Cutter Pump



Remko Sewage Cutter Pumps provide powerful and effective sewage disposal. The tungsten carbide cutting blade maintains optimum cutting efficiency.

Remko Sewage Cutter Pumps are proven performers, ideal in installations containing soft or fibrous solids that require shredding to prevent clogging in discharge pipework.

Max Head: 20m


Max Flow: 17 l/sec

FEATURES

- Automatic versions available in 240v & 415v
- Non-clog cutting impeller
- Heavy-duty construction
- Triplex seal system
- Thermal motor protection



PERFORMANCE CURVES

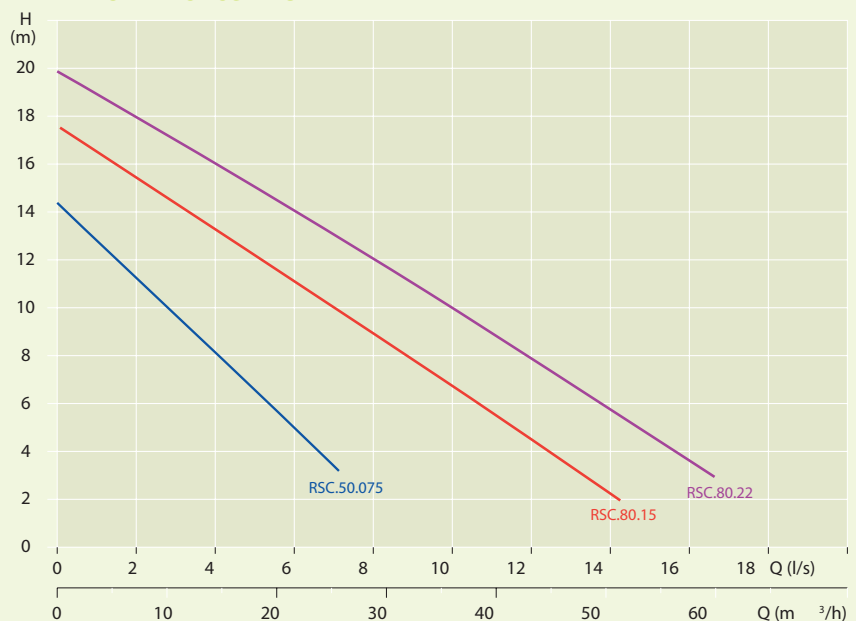

SPECIFICATIONS

Pump Model	Automatic option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSC.50.075	240v & 415v	50	0.75	4.8	1.9	2900	23	21
RSC.80.15	240v	80	1.5	9.2	3.4	2900	32	46
RSC.80.22	-	80	2.2	14.1	4.7	2900	35	48



Sewage Grinder Pump



Remko Sewage Grinder Pumps are a safe, dependable selection that will keep you pumping – trouble free, for years. With no compromise on engineering, quality or reliability, they are the tough solution for even the most demanding installations.

The efficient grinder mechanism provides an extremely powerful slicing action – the radial cutter and cutter ring dramatically reduces torque and kilowatt (horsepower) requirements, making it the most effective grinder pump available.

Max Head: 33m
Max Flow: 5 l/sec


FEATURES

- Automatic versions available in 240v & 415v
- Extremely reliable
- Triplex seal system
- Heavy-duty construction
- Hardened stainless radial cutter and cutter ring design maximises cutting ability and increases life
- Thermal motor protection

POWERFUL SLICING ACTION



PERFORMANCE CURVES

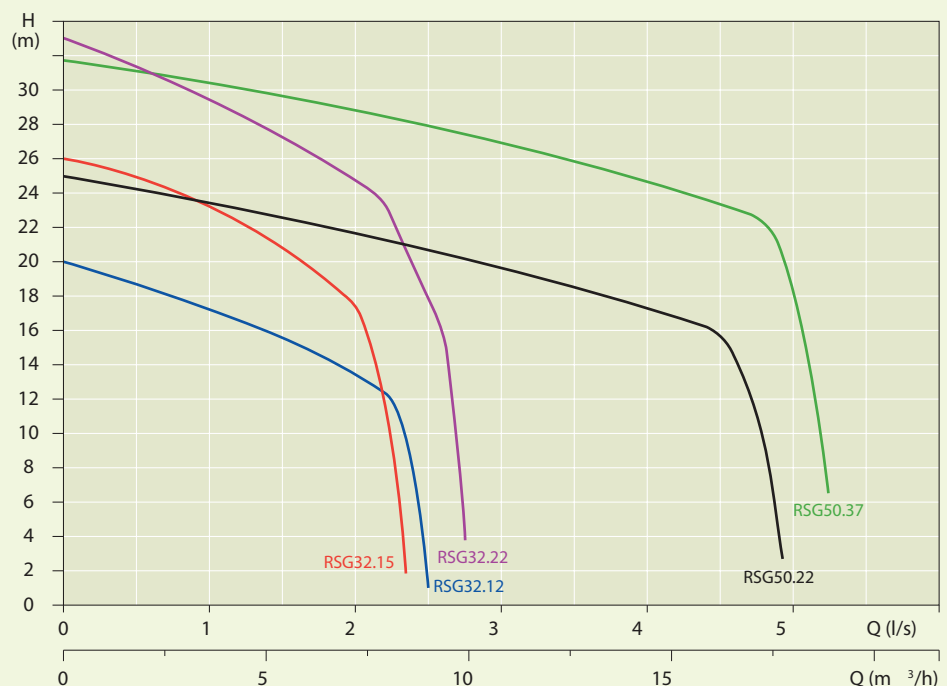

SPECIFICATIONS

Pump Model	Automatic option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSG.32.12	240v & 415v	32	1.2	8.0	4.3	2900	-	34
RSG.32.15	240v & 415v	32	1.5	9.8	3.4	2900	-	38
RSG.32.22	-	32	2.2	13.9	4.6	2900	-	36
RSG.50.22	-	50	2.2	-	5.2	2900	-	48
RSG.50.37	-	50	3.7	-	7.8	2900	-	54



Sewage Grinder Pump

Drainage of municipal, commercial and domestic sewage



RSG.32.15

SEWAGE
SHOPPING
CENTRES
COMMERCIAL
BUILDINGS
FACTORY
ESTATES
MUNICIPALITIES



RSG.50.22



Single Channel Pump



Remko heavy-duty wastewater and sewage pumps are engineered for extreme durability and reliability, this combined with their outstanding quality makes them ideal for the most demanding applications.

Each pump has been through stringent quality, precision and performance testing throughout production resulting in a superior line of pumps that you can trust.

Max Head: 40 m

Max Flow: 496 l/sec

RSM.100.75



SPECIFICATIONS

Pump Model	Outlet (mm)	Power (kW)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSM.100.55	100	5.5	11.1	1440	40	146
RSM.100.75	100	7.5	15.2	1440	40	163
RSM.150.75	150	7.5	15.2	1440	70	230
RSM.150.110	150	11	21.2	1440	70	263
RSM.150.150	150	15	31	1440	76	194
RSM.150.220	150	22	39	1440	76	251
RSM.200.110	200	11	21.2	1440	75	277
RSM.200.150	200	15	26.2	1440	75	285
RSM.200.220	200	22	40	1440	76	327
RSM.250.220	250	22	40	1440	60	745
RSM.250.300	250	30	62	1440	60	765
RSM.250.370	250	37	75	1440	60	770
RSM.350.220	350	22	43	970	120	950
RSM.350.300	350	30	68	970	120	965
RSM.400.370	400	37	74	970	120	965
RSM.400.450	400	45	84	970	120	970



Single Channel Pump

For demanding municipal, commercial or industrial wastewater applications





RSM.400.450



RSM.150.75

INDUSTRIAL
COMMERCIAL
MUNICIPAL
SEWAGE
STORMWATER
TRADEWASTE

PERFORMANCE CURVES

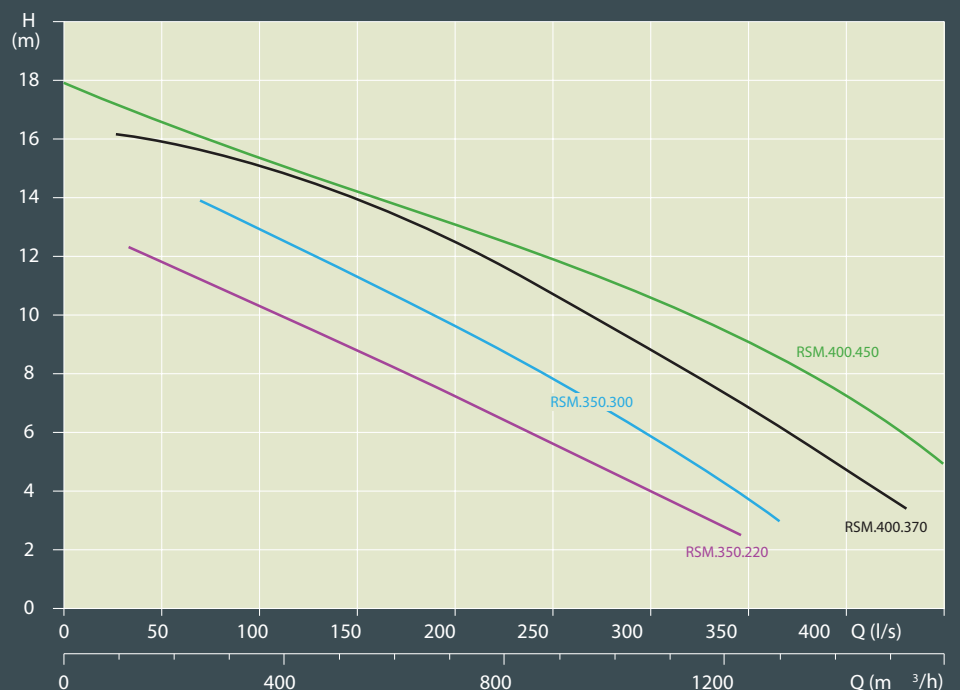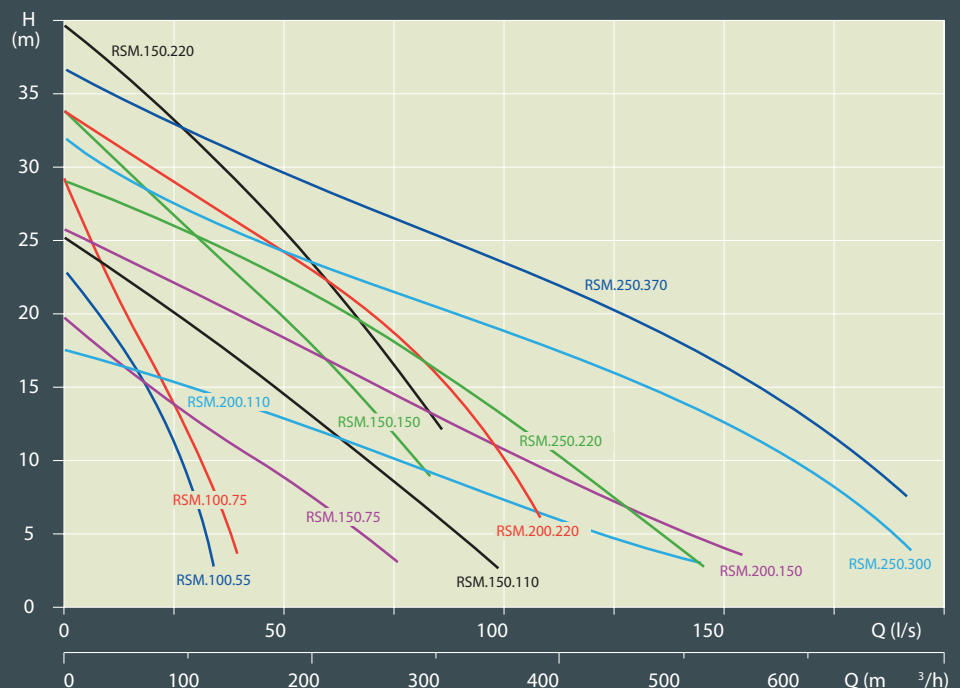



316 Stainless Steel Pump

Remko 316 Stainless Steel Pumps are ideal for corrosive and aggressive liquids.

Available in three versions including Drainage, Vortex and non-clog single vane impellers, Remko has an ideal selection for many applications.

Relied on by major dairy, food and beverage manufacturers, the aggressive recycling industries, mines and chemical processors, Remko can save you money through reduced downtime and increased reliability.


Max Head: 21m

Max Flow: 18 l/sec

FEATURES

- Automatic versions available in 240v & 415v
- Precision wax castings
- Viton Elastomers
- PVC cables
- Heavy-duty construction
- Triplex seal system
- Thermal motor protection

PERFORMANCE CURVES

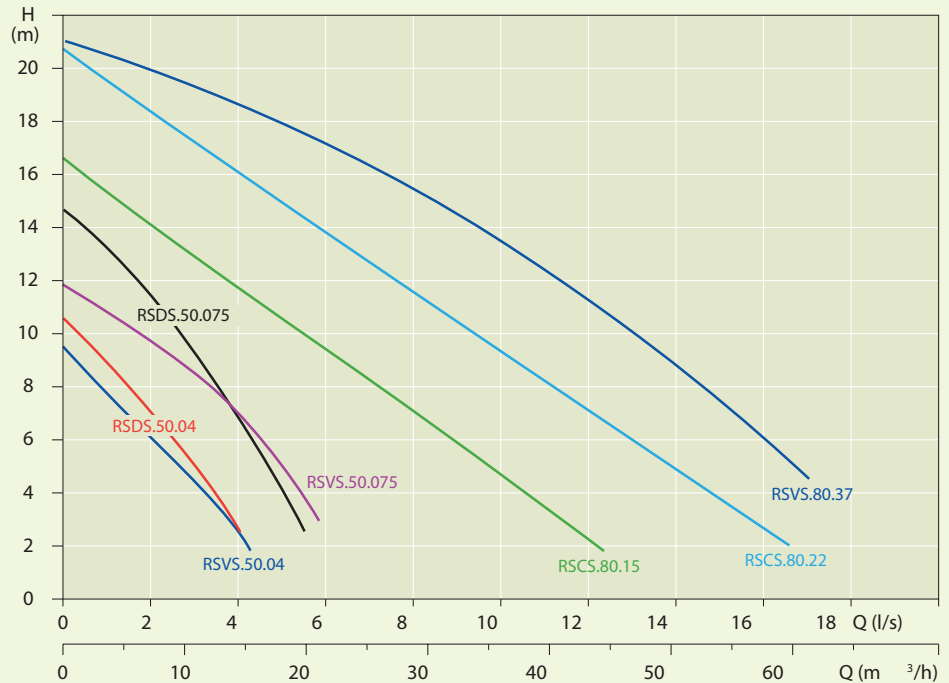

RSVS.50.075



RSDS.50.075



RSCS.80.22

SPECIFICATIONS

Pump Model	Automatic Option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSDS.50.04	240v	50	0.4	3.4	1.0	2900	8	16
RSVS.50.04	240v	50	0.4	3.1	1.2	2900	35	18
RSDS.50.075	240v & 415v	50	0.75	4.8	1.8	2900	10	15
RSVS.50.075	240v & 415v	50	0.75	5.0	1.9	2900	35	16
RSCS.80.15	-	80	1.5	-	3.1	2900	35	37
RSCS.80.22	-	80	2.2	-	4.5	2900	35	41
RSVS.80.37	-	80	3.7	-	7.6	2900	56	47



316 Stainless Steel Pump



Corrosive liquids in industrial or commercial applications



RSVS.80.37

CHEMICAL PLANTS
INDUSTRIAL PROCESS
FOOD PROCESSING
WINERIES
TRADEWASTE





Dewatering Pump



RSWA.80.37



RSW.50.11



RSW.80.22




CIVIL
CONSTRUCTION
SITES
MINES AND
QUARRIES
CONCRETE PLANTS
UNDERGROUND
TUNNELS AND
CARPARKS



Dewatering Pump

Pumping dirty water in mining and construction industry

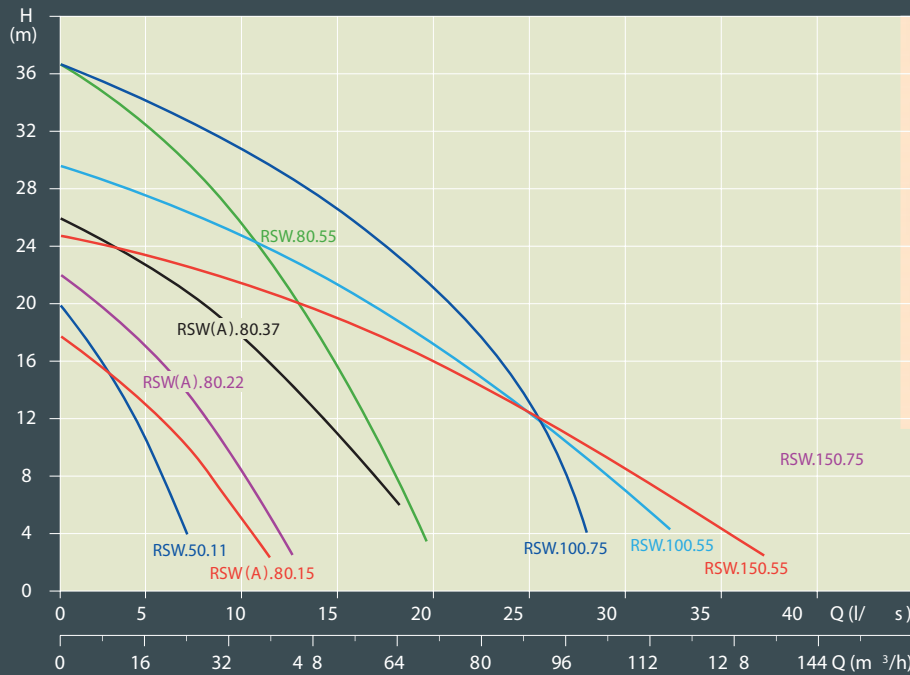

Remko Dewatering Pumps are portable dewatering pumps with many design features that maximise durability and versatility.

The High Chromium impeller and suction cover are case hardened to Rockwell 60C – this provides maximum abrasion resistance. Double hard face oil lubricated mechanical seals with an additional lip seal provides superior motor sealing. Corrosion resistant stainless steel secondary pump housing promises a lasting investment. Some models are available with a suction agitator to assist maintaining solids in suspension.

Max Head: 37m
Max Flow: 43 l/sec

FEATURES





- Heavy-duty construction
- Triplex seal system
- Abrasion resistant HCR impeller and suction cover
- Corrosion resistant stainless outer cover
- Suitable for low water level
- Water-cooled motor for maximum efficiency and operating times
- Suction agitator available on 1.5 kW – 3.7 kW pumps
- Thermal motor protection

SPECIFICATIONS

Pump Model	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weigh (kg)	Width (mm)	Height (mm)
RSW.50.11	50	1.1	7.0	2.5	2900	8	29	210	496
RSW(A).80.15	80	1.5	9.8	3.4	2900	11	42	256	628
RSW(A).80.22	80	2.2	14.5	4.9	2900	11	44	256	628
RSW(A).80.37	80	3.7	-	8.4	2900	11	48	256	628
RSW.80.55	80	5.5	-	10.9	2900	10	74	286	661
RSW.100.55	100	5.5	-	11.1	2900	10	76	286	661
RSW.100.75	100	7.5	-	14.5	2900	10	78	286	611
RSW.150.55	150	5.5	-	11.1	2900	10	78	286	723
RSW.150.75	150	7.5	-	14.3	2900	10	80	286	723



Amphibious Pump

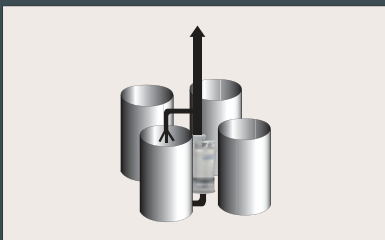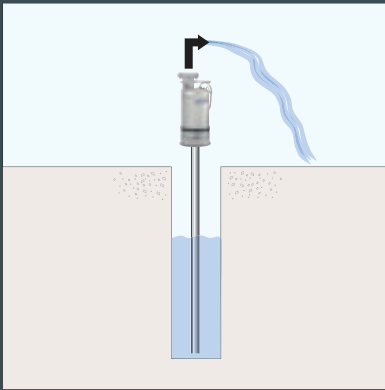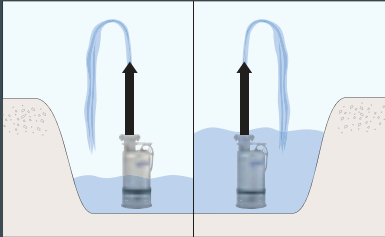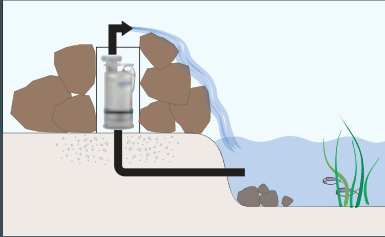

Unique amphibious pumps are suitable for submersible, semi-submersible and can be configured for dry mount installations.

IRRIGATION AND
WATER SUPPLY
WATER TRANSFER
COMMERCIAL
WATER FEATURES
AQUA CULTURE

RSA.80.22



RSA.50.11



Amphibious Pump

Remko Amphibious Pumps are suitable for submersible, semi-submersible and dry mount installations. Remko Amphibious Pumps are portable clean water pumps with unique design features that maximise durability and versatility.

Max Head: 23m

Max Flow: 29 l/sec

FEATURES


- Ability to connect multiple pumps in series for increased heads
- Remove strainer and install check valve for dry mount or self priming installations. Max. 8m section depth (80 & 100mm pumps)
- Ideal for limited and confined spaces
- Easily concealed for aqua landscaping purposes
- Portable design – simple to remove and relocate
- Water-cooled motor for increased efficiency and operating times
- Thermal motor protection
- Triplex seal system



Heavy-duty pumps for industrial, commercial and rural applications



PERFORMANCE CURVES

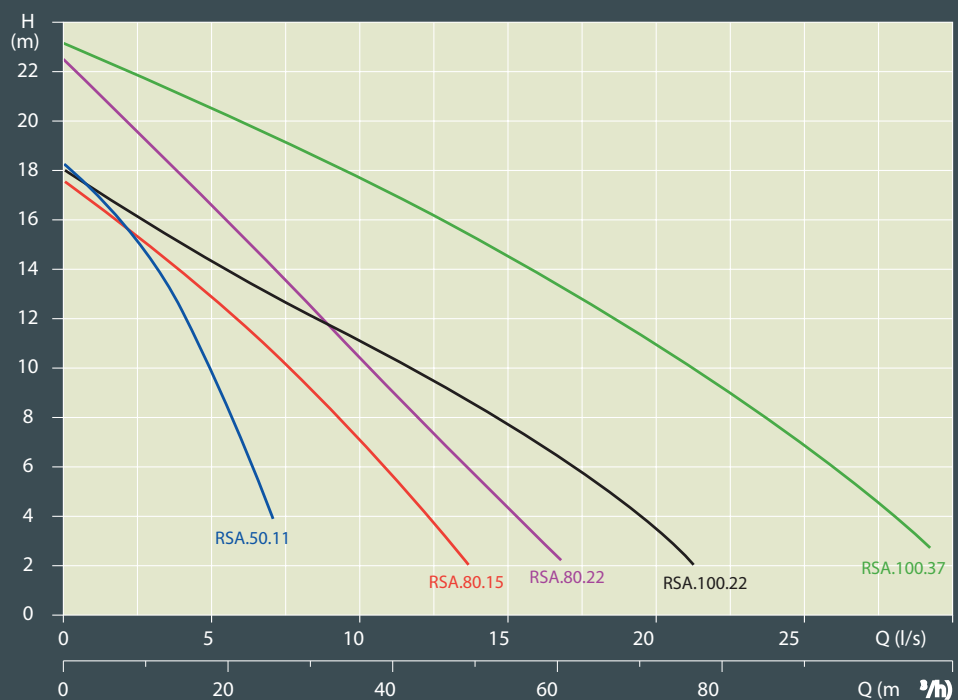

SPECIFICATIONS

Pump Model	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)	Width (mm)	Height (mm)
RSA.50.11	50	1.1	7.0	2.5	2900	4	30	210	496
RSA.80.15	80	1.5	9.2	3.4	2900	8	44	238	616
RSA.80.22	80	2.2	14.1	4.7	2900	8	46	238	536
RSA.100.22	100	2.2	14.1	4.7	2900	11	47	238	536
RSA.100.37	100	3.7	-	7.8	2900	11	47	238	561



Axial Flow Pump



RX.200.55



RX.300.110



The concept of utilising a submersible pump system is favoured due to the reduction or elimination of superstructure, noise, cooling issues, installation and operation costs.

Remko Axial Flow Pumps are compact high performance pumps. They benefit with design features that reduce maintenance requirements and maximise reliability.

Max Head: 9m

Max Flow: 1333 l/sec

OPTIONS AVAILABLE

- Condition monitors and motor protection
- Bearing Thermal Protection (BTP) enables preventative maintenance prior to bearing failure. This eliminates costly and possible destructive damage
- Seal probes monitor the seal chamber oil for indications of any seal leakage
- Thermal motor protection
- Special coatings
- Zinc anodes for sea water installations

PERFORMANCE CURVES



SPECIFICATIONS

Pump Model	Outlet (mm)	Power (kW)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Free Standing			Well Type		
						Width (mm)	Height (mm)	Weight (kg)	Width (mm)	Height (mm)	Weight (kg)
RSX.150.15	150	1.5	3.8	1440	20	-	-	-	285	638	50
RSX.150.22	150	2.2	5.0	1440	20	-	-	-	285	638	52
RSX.200.55	200	5.5	11.1	1440	22	-	-	-	340	923	122
RSX.250.75	250	7.5	14.8	1440	22	-	-	-	380	1015	164
RSX.300.110	300	11.0	21.0	1440	23	-	-	-	430	1077	209
RSX.550.370	550	37.0	80.0	750	-	780	1300	850	780	1960	1180
RSX.700.550	700	55.0	115.0	600	-	870	2150	1530	870	2760	2060
RSX.700.750	700	75.0	182.0	600	-	870	2150	1600	870	2760	2130



Axial Flow Pump




RSX.550.370




*High volume
water transfer*

STORMWATER AND
FLOOD CONTROL
HIGH VOLUME
DEWATERING
WASTEWATER
TREATMENT
FACILITIES
WETLAND LEVEL
CONTROL
INDUSTRY


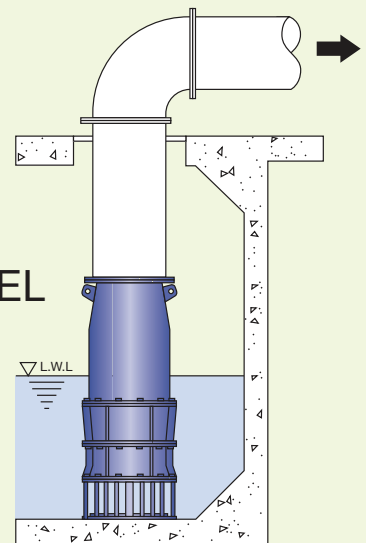


FREE STANDING

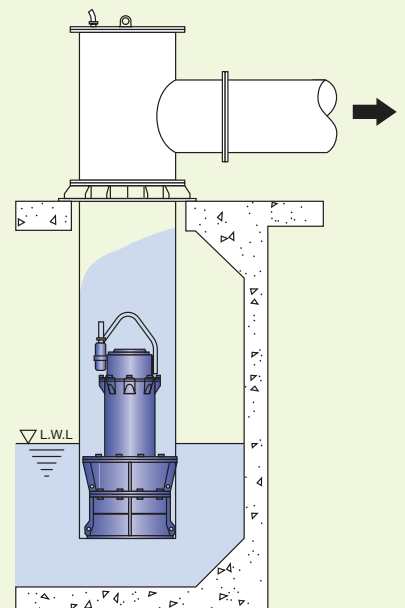

WELL TYPE

Dimensions


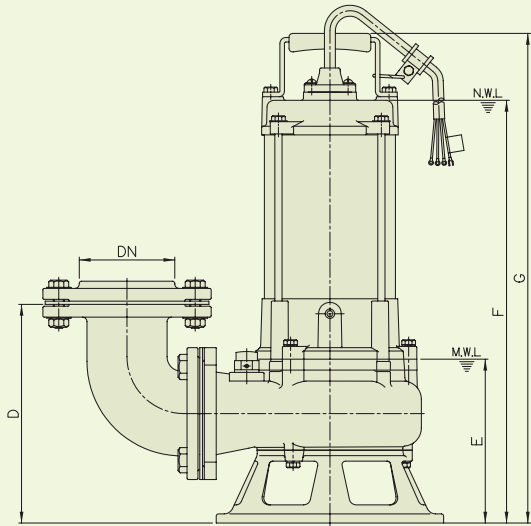
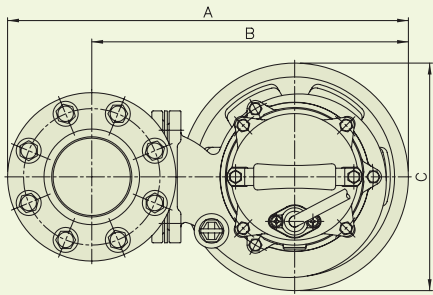


Free Standing

	Pump Model	Outlet (mm)	A	B	C	D	E	F	G
Drainage	RSD.50.04	50	209	174	148	75	100	270	349
	RSD.50.075	50	245	207	174	109	115	375	429
	RSD.50.11	50	256	220	191	95	100	320	421
	RSD.50.22	50	280	242	216	128	130	420 (498)	493 (572)
	RSD.80.075	80	278	224	173	457	403	142	135
	RSD.80.15	80	365	310	200	204	156	433	506
	RSD.80.22	80	385	328	216	195	132	422 (500)	495 (575)
	RSDC.80.37	80	468	376	242	250	162	492	565
	RSD.100.22	100	442	348	216	230	130	422 (500)	495 (575)
	RSDC.100.55	100	597	492	307	295	210	615	710
Vortex	RSV.50.04	50	214	105	146	85	100	317	372
	RSV.50.075	50	237	199	154	99	100	372	427
	RSVC.50.075	50	346	308	204	160	150	459	516
	RSV.80.15	80	408	352	258	215	166	458 (535)	530 (610)
	RSVC.80.15	80	443	389	255	232	235	557	621
	RSVC.80.22	80	538	445	289	267	235	600	675
	RSVC.80.37	80	478	385	220	215	158	515	588
	RSVC.80.37(4)	80	538	445	289	267	235	620	695
	RSVC.100.55	100	687	582	385	377	311	698	807
	RSC.50.075	50	274	238	235	147	150	386	440
Cutter	RSC.80.15	80	408	352	258	215	166	458 (535)	530 (610)
	RSC.80.22	80	408	352	258	215	166	458 (535)	530 (610)
	RSG.32.12	32	285	250	203	156	160	483 (553)	546 (597)
Grinder	RSG.32.15	32	285	250	203	156	160	483 (553)	546 (597)
	RSG.32.22	32	285	250	203	156	160	483 (566)	546 (630)
	RSG.50.22	50	393	316	226	226	180	543	616
	RSG.50.37	50	393	316	226	226	180	543	616
	RSMC.100.55	100	687	582	385	377	311	698	807
	RSMC.100.75	100	687	582	385	377	311	707	816
	RSMC.150.75	150	888	748	449	493	365	762	870
Single Channel	RSMC.150.110	150	895	755	477	450	367	905	1026
	RSMC.150.150	150	806	666	455	385	329	788	938
	RSMC.150.220	150	850	710	497	398	332	871	1021
	RSMC.200.110	200	1045	880	501	483	372	910	1032
	RSMC.200.150	200	1045	880	501	483	372	910	1032
	RSMC.200.220	200	896	731	479	411	285	848	998
	RSMC.250.220	250	993	593	541	634	400	942	1092
	RSMC.250.300	250	1273	1070	676	684	660	-	1621
	RSMC.250.370	250	1273	1070	676	684	660	-	1621
	RSMC.350.220	350	1544	1277	813	884	800	-	1764
	RSMC.350.300	350	1544	1277	813	884	800	-	1764
	RSMC.400.370	400	1544	1277	813	884	800	-	1764
	RSMC.400.450	400	1544	1277	813	884	800	-	1764

Notes NWL: Normal Water Level
 MWL: Minimum Water Level
 (): Dimensions in brackets are for 240v pumps and 415v automatic models
 For 316 Stainless Steel pump dimensions: refer to the technical data sheet

Dimensions

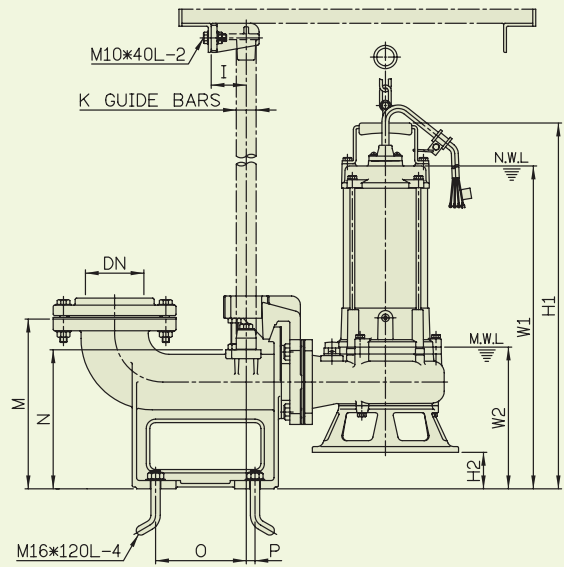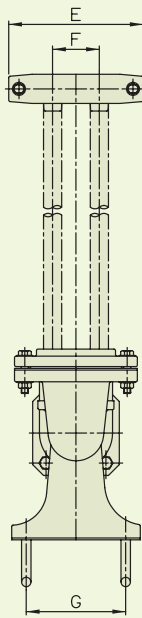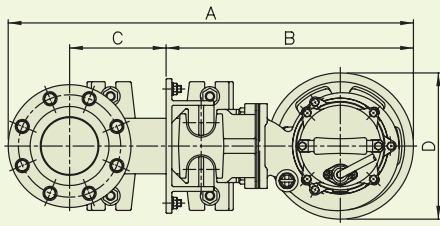


Auto Coupling

Pump Model	Outlet (mm)	A	B	C	D	E	F	G	I	K	M	N	O	P	W1	W2	H1	H2	
RSD.50.04	50	512	319	115	148	230	70	120	50	1"	250	203	108	13	312	142	391	42	Drainage
RSD.50.075	50	545	352	115	174	230	70	120	50	1"	250	203	108	13	378	117	435	8	
RSD.50.11	50	558	365	115	191	230	70	120	50	1"	250	203	108	13	329	119	440	19	
RSD.50.22	50	580	387	115	216	230	70	120	50	1"	250	203	108	13	451 (529)	117	525 (604)	8	
RSD.80.15	80	603	380	130	200	230	80	150	60	1 1/4"	285	233	135	15	495	218	568	62	
RSD.80.22	80	621	398	130	216	230	80	150	60	1 1/4"	285	233	135	15	442 (570)	117	566 (646)	70	Vortex
RSDC.80.37	80	648	426	130	242	230	80	150	60	1 1/4"	285	233	135	15	543	213	617	51	
RSD.100.22	100	621	398	130	216	230	80	150	60	1 1/4"	285	233	135	15	442 (570)	117	566 (646)	70	
RSDC.100.55	100	817	542	170	307	290	100	200	70	2"	325	270	176	24	675	270	770	60	
RSV.50.04	50	514	321	115	146	230	70	120	50	1"	250	203	108	13	347	130	402	30	
RSV.50.075	50	537	344	115	154	230	70	120	50	1"	250	203	108	13	390	116	442	16	Cutter
RSVC.50.075	50	567	373	116	204	230	70	120	50	1"	250	203	108	13	533	225	591	75	
RSV.80.15	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	
RSVC.80.15	80	708	485	130	290	230	80	150	60	1 1/4"	285	233	135	15	604	282	668	47	
RSVC.80.22	80	734	511	130	313	230	80	150	60	1 1/4"	285	233	135	15	647	282	722	47	
RSVC.80.37	80	655	432	130	220	230	80	150	60	1 1/4"	285	233	135	15	598	268	672	89	Grinder
RSVC.80.3(74)	80	734	511	130	313	230	80	150	60	1 1/4"	285	233	135	15	667	282	742	47	
RSVC.100.55	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	676	289	785	118	
RSC.50.075	50	542	439	115	146	230	70	120	50	1"	250	203	108	13	356	120	410	50	
RSC.80.15	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	
RSC.80.22	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	Single Channel
RSG.32.12	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (480)	106	493 (544)	6	
RSG.32.15	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (480)	106	493 (544)	6	
RSG.32.22	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (513)	106	493 (577)	6	
RSG.50.22	50	569	375	116	226	230	70	120	50	1"	250	203	108	13	575	193	648	33	
RSG.50.37	50	569	375	116	226	230	70	120	50	1"	250	203	108	13	575	193	648	33	
RSMC.100.55	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	676	289	785	118	
RSMC.100.75	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	685	289	794	118	
RSMC.150.75	150	1035	708	187	449	260	135	280	95	2"	455	-	240	40	779	382	887	182	
RSMC.150.110	150	1035	708	187	449	260	135	280	95	2"	455	-	240	40	992	384	1043	182	
RSMC.150.150	150	922	721	170	455	290	100	200	70	2"	325	270	176	24	798	339	948	10	
RSMC.150.220	150	966	765	170	497	290	100	200	70	2"	325	270	176	40	881	342	1031	10	
RSMC.200.110	200	1159	757	230	491	300	175	320	95	2"	545	-	269	41	948	410	1070	176	
RSMC.200.150	200	1159	757	230	491	300	175	320	95	2"	545	-	269	41	948	410	1070	176	
RSMC.200.220	200	1228	826	230	479	300	175	320	95	2"	545	423	296	41	858	285	1008	10	
RSMC.250.220	250	1388	948	230	541	300	175	360	95	2"	695	-	296	41	932	390	1082	-	
RSMC.250.300	250	1558	1025	330	676	460	340	360	120	2 1/2"	650	-	385	45	1412	602	1562	203	
RSMC.250.370	250	1558	1025	330	676	460	340	360	120	2 1/2"	650	-	385	45	1412	602	1562	203	
RSMC.350.220	350	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.350.300	350	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.400.370	400	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.400.450	400	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	

Notes

NWL: Normal Water Level
 MWL: Minimum Water Level
 (): Dimensions in brackets are for 240v pumps and 415v automatic models
 For 316 Stainless Steel pump dimensions: refer to the technical data sheet


Dimensions

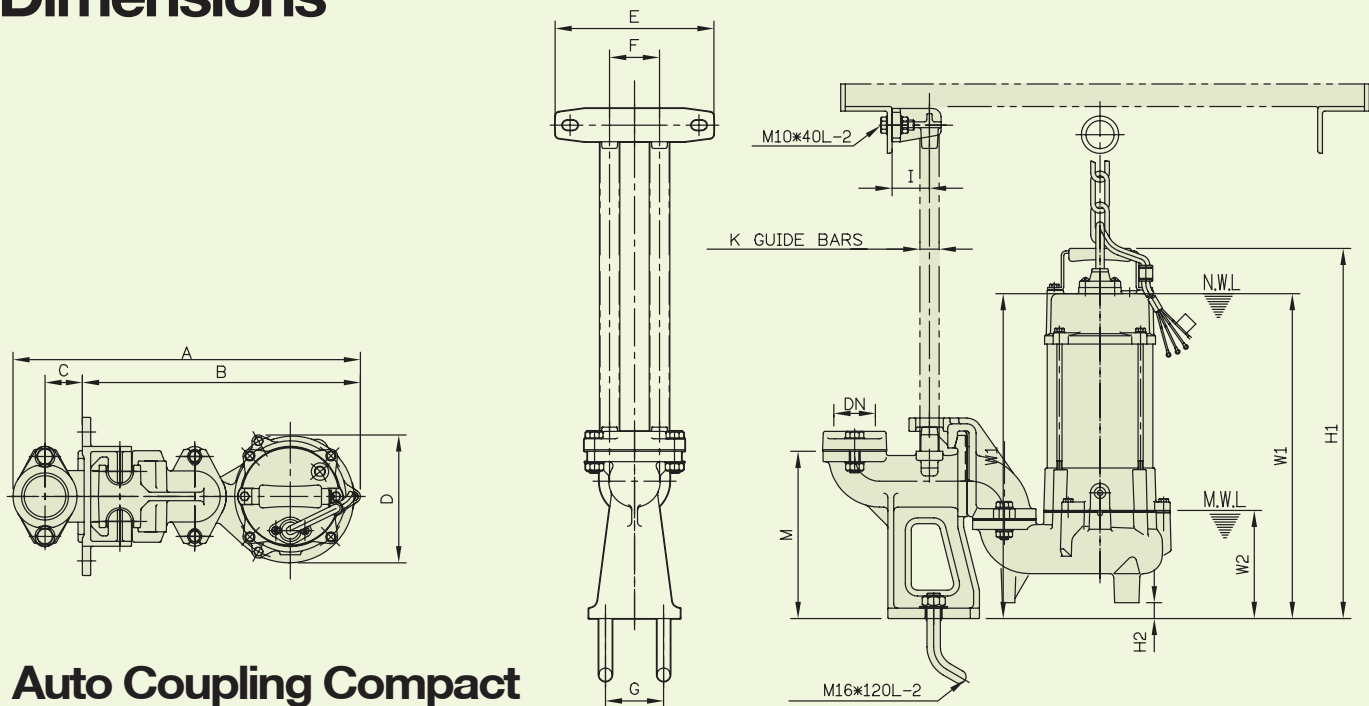

Auto Coupling Compact

Pump Model	Outlet (mm)	A	B	C	D	E	F	G	I	K	M	W1	W2	H1	H2
RSD.50.04	50	393	309	45	146	190	60	70	50	3/4"	201	314	144	398	44
RSD.50.075	50	425	342	45	173	190	60	70	50	3/4"	201	385	110	439	10
RSD.50.11	50	417	334	45	162	190	60	70	50	3/4"	201	320	116	414	16
RSV.50.04	50	397	314	45	146	190	60	70	50	3/4"	201	349	129	403	33
RSV.50.075	50	418	334	45	154	190	60	70	50	3/4"	201	391	128	445	19
RSC.50.075	50	425	341	45	173	190	60	70	50	3/4"	201	381	110	435	53

Spare Parts & Back Up Service

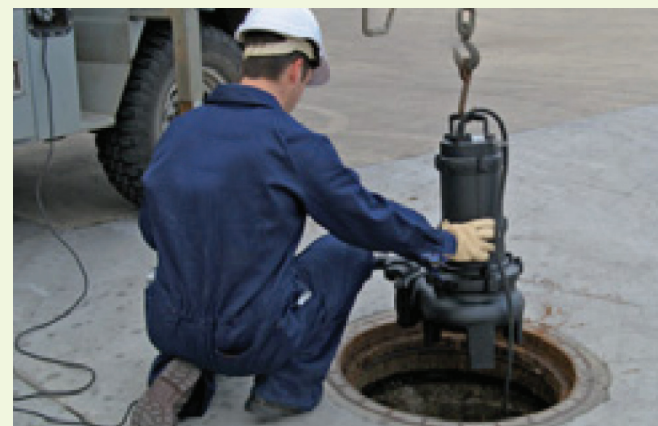

Advantages

Remko is supported by a complete supply of spare parts and accessories to keep you pumping at peak efficiency.

PUMP CONTROLLERS

- Complete line of pump and pump system control, alarms and monitor panels

AUTO COUPLING KITS

- Auto Coupling system complete with discharge pedestal, upper guide rail bracket and guide claw

CHAIN AND SHACKLES

- Pump lifting chains and shackles

VALVES

- Isolation valves
- Non-return valves
- Anti-syphon valves
- Air release valves

PLASTIC PLUMBING FITTINGS

- Complete line of PVC and polypropylene plastic fittings

DISCHARGE HOSES



- Hose assemblies can be made for ease of installation on site

METAL PLUMBING HARDWARE/FITTINGS

- Complete line of brass, bronze and stainless steel fittings

LEVEL SENSORS

- Float switches
- Probes
- Ultrasonic sensors
- Conductivity probes
- Level indication

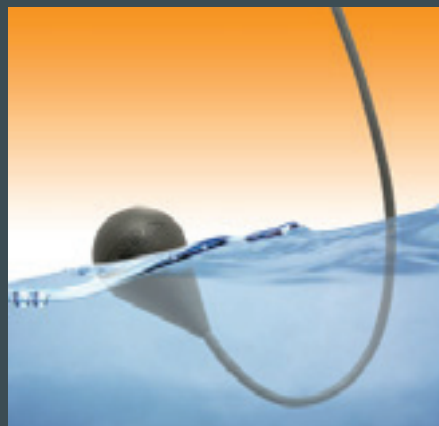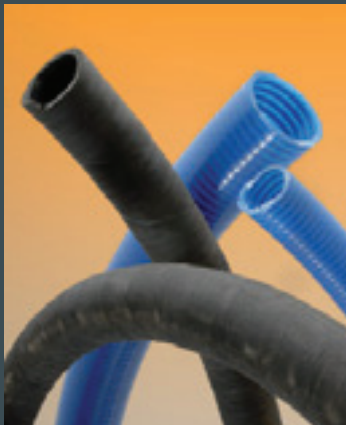

- Construction Sites
- Mining
- Excavation Dewatering
- Waste Water Treatment
- Abattoirs
- Food Processing
- Industrial Waste

Contact your local Remko distributor

Remko 1800 333 424