
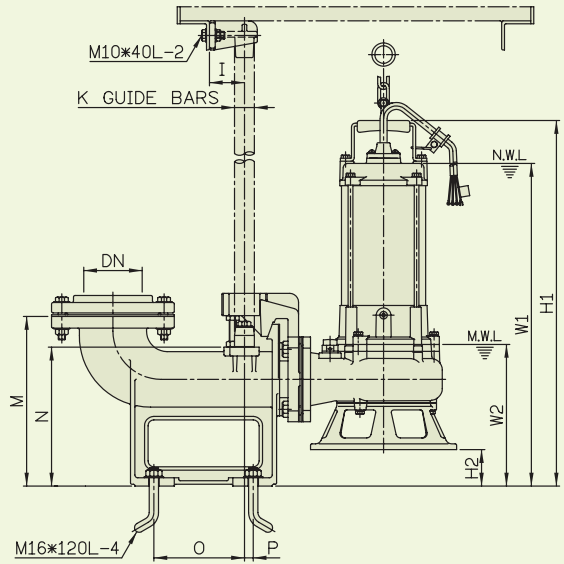



Dimensions

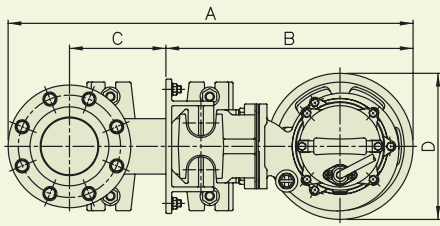




Auto Coupling

Pump Model	Outlet (mm)	A	B	C	D	E	F	G	I	K	M	N	O	P	W1	W2	H1	H2	
RSD.50.04	50	512	319	115	148	230	70	120	50	1"	250	203	108	13	312	142	391	42	Drainage
RSD.50.075	50	545	352	115	174	230	70	120	50	1"	250	203	108	13	378	117	435	8	
RSD.50.11	50	558	365	115	191	230	70	120	50	1"	250	203	108	13	329	119	440	19	
RSD.50.22	50	580	387	115	216	230	70	120	50	1"	250	203	108	13	451 (529)	117	525 (604)	8	
RSD.80.15	80	603	380	130	200	230	80	150	60	1 1/4"	285	233	135	15	495	218	568	62	
RSD.80.22	80	621	398	130	216	230	80	150	60	1 1/4"	285	233	135	15	442 (570)	117	566 (646)	70	Vortex
RSDC.80.37	80	648	426	130	242	230	80	150	60	1 1/4"	285	233	135	15	543	213	617	51	
RSD.100.22	100	621	398	130	216	230	80	150	60	1 1/4"	285	233	135	15	442 (570)	117	566 (646)	70	
RSDC.100.55	100	817	542	170	307	290	100	200	70	2"	325	270	176	24	675	270	770	60	
RSV.50.04	50	514	321	115	146	230	70	120	50	1"	250	203	108	13	347	130	402	30	
RSV.50.075	50	537	344	115	154	230	70	120	50	1"	250	203	108	13	390	116	442	16	Cutter
RSVC.50.075	50	567	373	116	204	230	70	120	50	1"	250	203	108	13	533	225	591	75	
RSV.80.15	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	
RSVC.80.15	80	708	485	130	290	230	80	150	60	1 1/4"	285	233	135	15	604	282	668	47	
RSVC.80.22	80	734	511	130	313	230	80	150	60	1 1/4"	285	233	135	15	647	282	722	47	
RSVC.80.37	80	655	432	130	220	230	80	150	60	1 1/4"	285	233	135	15	598	268	672	89	Grinder
RSVC.80.37(4)	80	734	511	130	313	230	80	150	60	1 1/4"	285	233	135	15	667	282	742	47	
RSVC.100.55	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	676	289	785	118	
RSC.50.075	50	542	439	115	146	230	70	120	50	1"	250	203	108	13	356	120	410	50	
RSC.80.15	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	
RSC.80.22	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	Single Channel
RSG.32.12	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (480)	106	493 (544)	6	
RSG.32.15	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (480)	106	493 (544)	6	
RSG.32.22	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (513)	106	493 (577)	6	
RSG.50.22	50	569	375	116	226	230	70	120	50	1"	250	203	108	13	575	193	648	33	
RSG.50.37	50	569	375	116	226	230	70	120	50	1"	250	203	108	13	575	193	648	33	
RSMC.100.55	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	676	289	785	118	
RSMC.100.75	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	685	289	794	118	
RSMC.150.75	150	1035	708	187	449	260	135	280	95	2"	455	-	240	40	779	382	887	182	
RSMC.150.110	150	1035	708	187	449	260	135	280	95	2"	455	-	240	40	992	384	1043	182	
RSMC.150.150	150	922	721	170	455	290	100	200	70	2"	325	270	176	24	798	339	948	10	
RSMC.150.220	150	966	765	170	497	290	100	200	70	2"	325	270	176	40	881	342	1031	10	
RSMC.200.110	200	1159	757	230	491	300	175	320	95	2"	545	-	269	41	948	410	1070	176	
RSMC.200.150	200	1159	757	230	491	300	175	320	95	2"	545	-	269	41	948	410	1070	176	
RSMC.200.220	200	1228	826	230	479	300	175	320	95	2"	545	423	296	41	858	285	1008	10	
RSMC.250.220	250	1388	948	230	541	300	175	360	95	2"	695	-	296	41	932	390	1082	-	
RSMC.250.300	250	1558	1025	330	676	460	340	360	120	2 1/2"	650	-	385	45	1412	602	1562	203	
RSMC.250.370	250	1558	1025	330	676	460	340	360	120	2 1/2"	650	-	385	45	1412	602	1562	203	
RSMC.350.220	350	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.350.300	350	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.400.370	400	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.400.450	400	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	

Notes

NWL: Normal Water Level
 MWL: Minimum Water Level
 (): Dimensions in brackets are for 240v pumps and 415v automatic models
 For 316 Stainless Steel pump dimensions: refer to the technical data sheet

Dimensions

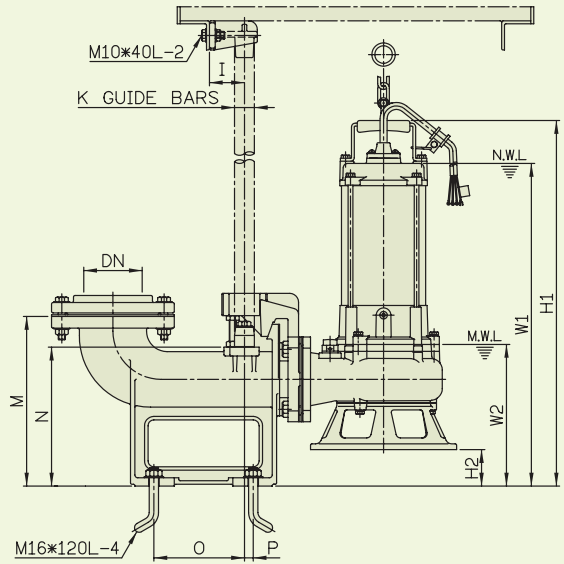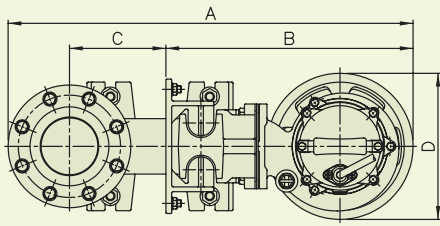

Auto Coupling

Pump Model	Outlet (mm)	A	B	C	D	E	F	G	I	K	M	N	O	P	W1	W2	H1	H2	
RSD.50.04	50	512	319	115	148	230	70	120	50	1"	250	203	108	13	312	142	391	42	Drainage
RSD.50.075	50	545	352	115	174	230	70	120	50	1"	250	203	108	13	378	117	435	8	
RSD.50.11	50	558	365	115	191	230	70	120	50	1"	250	203	108	13	329	119	440	19	
RSD.50.22	50	580	387	115	216	230	70	120	50	1"	250	203	108	13	451 (529)	117	525 (604)	8	
RSD.80.15	80	603	380	130	200	230	80	150	60	1 1/4"	285	233	135	15	495	218	568	62	
RSD.80.22	80	621	398	130	216	230	80	150	60	1 1/4"	285	233	135	15	442 (570)	117	566 (646)	70	Vortex
RSDC.80.37	80	648	426	130	242	230	80	150	60	1 1/4"	285	233	135	15	543	213	617	51	
RSD.100.22	100	621	398	130	216	230	80	150	60	1 1/4"	285	233	135	15	442 (570)	117	566 (646)	70	
RSDC.100.55	100	817	542	170	307	290	100	200	70	2"	325	270	176	24	675	270	770	60	
RSV.50.04	50	514	321	115	146	230	70	120	50	1"	250	203	108	13	347	130	402	30	
RSV.50.075	50	537	344	115	154	230	70	120	50	1"	250	203	108	13	390	116	442	16	Cutter
RSVC.50.075	50	567	373	116	204	230	70	120	50	1"	250	203	108	13	533	225	591	75	
RSV.80.15	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	
RSVC.80.15	80	708	485	130	290	230	80	150	60	1 1/4"	285	233	135	15	604	282	668	47	
RSVC.80.22	80	734	511	130	313	230	80	150	60	1 1/4"	285	233	135	15	647	282	722	47	
RSVC.80.37	80	655	432	130	220	230	80	150	60	1 1/4"	285	233	135	15	598	268	672	89	Grinder
RSVC.80.37(4)	80	734	511	130	313	230	80	150	60	1 1/4"	285	233	135	15	667	282	742	47	
RSVC.100.55	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	676	289	785	118	
RSC.50.075	50	542	439	115	146	230	70	120	50	1"	250	203	108	13	356	120	410	50	
RSC.80.15	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	
RSC.80.22	80	645	422	130	258	230	80	150	60	1 1/4"	285	233	135	15	510 (587)	219	583 (663)	58	Single Channel
RSG.32.12	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (480)	106	493 (544)	6	
RSG.32.15	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (480)	106	493 (544)	6	
RSG.32.22	50	588	395	115	203	230	70	120	50	1"	250	203	108	13	430 (513)	106	493 (577)	6	
RSG.50.22	50	569	375	116	226	230	70	120	50	1"	250	203	108	13	575	193	648	33	
RSG.50.37	50	569	375	116	226	230	70	120	50	1"	250	203	108	13	575	193	648	33	
RSMC.100.55	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	676	289	785	118	
RSMC.100.75	100	923	648	170	385	290	100	200	70	2"	325	270	176	24	685	289	794	118	
RSMC.150.75	150	1035	708	187	449	260	135	280	95	2"	455	-	240	40	779	382	887	182	
RSMC.150.110	150	1035	708	187	449	260	135	280	95	2"	455	-	240	40	992	384	1043	182	
RSMC.150.150	150	922	721	170	455	290	100	200	70	2"	325	270	176	24	798	339	948	10	
RSMC.150.220	150	966	765	170	497	290	100	200	70	2"	325	270	176	40	881	342	1031	10	
RSMC.200.110	200	1159	757	230	491	300	175	320	95	2"	545	-	269	41	948	410	1070	176	
RSMC.200.150	200	1159	757	230	491	300	175	320	95	2"	545	-	269	41	948	410	1070	176	
RSMC.200.220	200	1228	826	230	479	300	175	320	95	2"	545	423	296	41	858	285	1008	10	
RSMC.250.220	250	1388	948	230	541	300	175	360	95	2"	695	-	296	41	932	390	1082	-	
RSMC.250.300	250	1558	1025	330	676	460	340	360	120	2 1/2"	650	-	385	45	1412	602	1562	203	
RSMC.250.370	250	1558	1025	330	676	460	340	360	120	2 1/2"	650	-	385	45	1412	602	1562	203	
RSMC.350.220	350	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.350.300	350	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.400.370	400	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	
RSMC.400.450	400	1923	1203	440	813	650	500	580	135	4"	950	-	691	19	1625	812	1775	372	

Notes

NWL: Normal Water Level
 MWL: Minimum Water Level
 (): Dimensions in brackets are for 240v pumps and 415v automatic models
 For 316 Stainless Steel pump dimensions: refer to the technical data sheet