

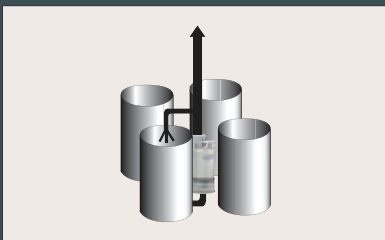
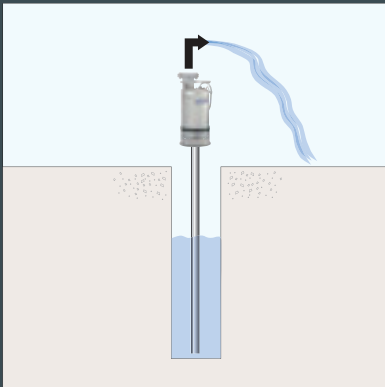


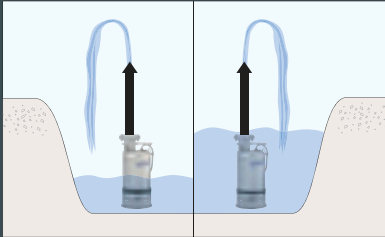

Amphibious Pumps

RSA Series

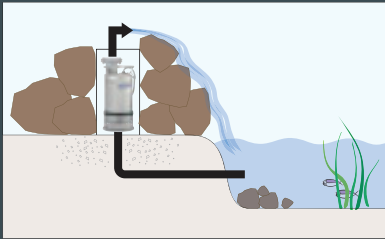

Unique amphibious pumps are suitable for submersible, semi-submersible and can be configured for dry mount installations.

IRRIGATION AND
WATER SUPPLY
WATER TRANSFER
COMMERCIAL
WATER FEATURES
AQUA CULTURE

RSA.80.22



RSA.50.11



Amphibious Pumps

Remko Amphibious Pumps are suitable for submersible, semi-submersible and dry mount installations. Remko Amphibious Pumps are portable clean water pumps with unique design features that maximise durability and versatility.

Max Head: 23m

Max Flow: 29 l/sec

FEATURES

- Ability to connect multiple pumps in series for increased heads
- Remove strainer and install check valve for dry mount or self priming installations. Max. 8m section depth (80 & 100mm pumps)
- Ideal for limited and confined spaces
- Easily concealed for aqua landscaping purposes
- Portable design – simple to remove and relocate
- Water-cooled motor for increased efficiency and operating times
- Thermal motor protection
- Triplex seal system



Heavy-duty pumps for industrial, commercial and rural applications



PERFORMANCE CURVES



SPECIFICATIONS

Pump Model	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weigh (kg)	Width (mm)	Height (mm)
RSA.50.11	50	1.1	7.0	2.5	2900	4	30	210	496
RSA.80.15	80	1.5	9.2	3.4	2900	8	44	238	616
RSA.80.22	80	2.2	14.1	4.7	2900	8	46	238	536
RSA.100.22	100	2.2	14.1	4.7	2900	11	47	238	536
RSA.100.37	100	3.7	-	7.8	2900	11	47	238	561