



Submersible Drainage Pumps

RSD Series



RSD.50.075



RSDC.100.55

STORMWATER
SHOPPING CENTRES
COMMERCIAL BUILDINGS
BASEMENT CARPARKS
INDUSTRIAL PROCESS



RSD.80.22



Drainage Pumps



*For drainage of liquids
with small solids in suspension*

Remko Drainage Pumps are keeping basements dry, carpark drained and industry in production. These tough performers are built to the highest standard to guarantee a lasting investment.


Max Head: 33m

Max Flow: 23 l/sec

FEATURES

- Automatic versions available in 240v & 415v
- Heavy-duty construction
- Triplex seal system
- Thermal motor protection

PERFORMANCE CURVES

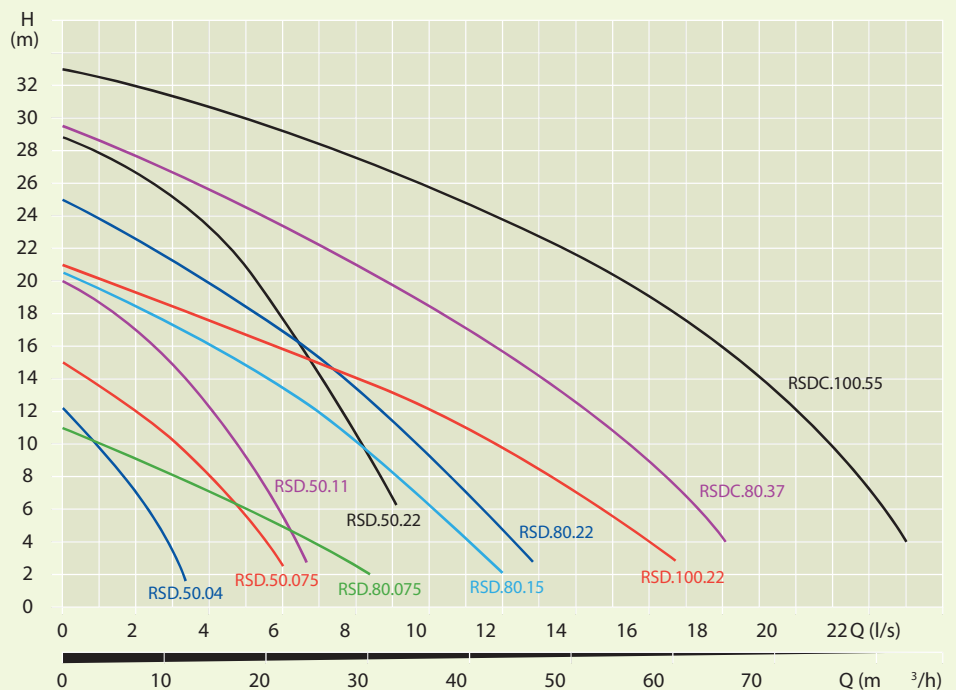

SPECIFICATIONS

Pump Model	Automatic option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSD.50.04	240v	50	0.4	2.6	-	2900	5	12
RSD.50.075	240v & 415v	50	0.75	4.8	1.8	2900	10	19
RSD.50.11	-	50	1.1	7.0	2.5	2900	8	24
RSD.50.22	-	50	2.2	14.1	4.7	2900	11	42
RSD.80.075	240v	80	0.75	5.3	1.9	2900	10	21
RSD.80.15	240v	80	1.5	9.2	3.4	2900	11	44
RSD.80.22	-	80	2.2	14.1	4.7	2900	11	47
RSDC.80.37	-	80	3.7	-	7.8	2900	16	60
RSD.100.22	-	100	2.2	-	4.7	2900	11	47
RSDC.100.55	-	100	5.5	-	11.8	2900	20	98