



Submersible Sewage Grinder Pumps

RSG Series

Drainage of municipal, commercial and domestic sewage



RSG.32.15



RSG.50.22

SEWAGE
SHOPPING
CENTRES
COMMERCIAL
BUILDINGS
FACTORY
ESTATES
MUNICIPALITIES



Sewage Grinder Pump



Remko Sewage Grinder Pumps are a safe, dependable selection that will keep you pumping – trouble free, for years. With no compromise on engineering, quality or reliability, they are the tough solution for even the most demanding installations.

The efficient grinder mechanism provides an extremely powerful slicing action – the radial cutter and cutter ring dramatically reduces torque and kilowatt (horsepower) requirements, making it the most effective grinder pump available.

Max Head: 33m
Max Flow: 5 l/sec


FEATURES

- Automatic versions available in 240v & 415v
- Extremely reliable
- Triplex seal system
- Heavy-duty construction
- Hardened stainless radial cutter and cutter ring design maximises cutting ability and increases life
- Thermal motor protection

POWERFUL SLICING ACTION



PERFORMANCE CURVES

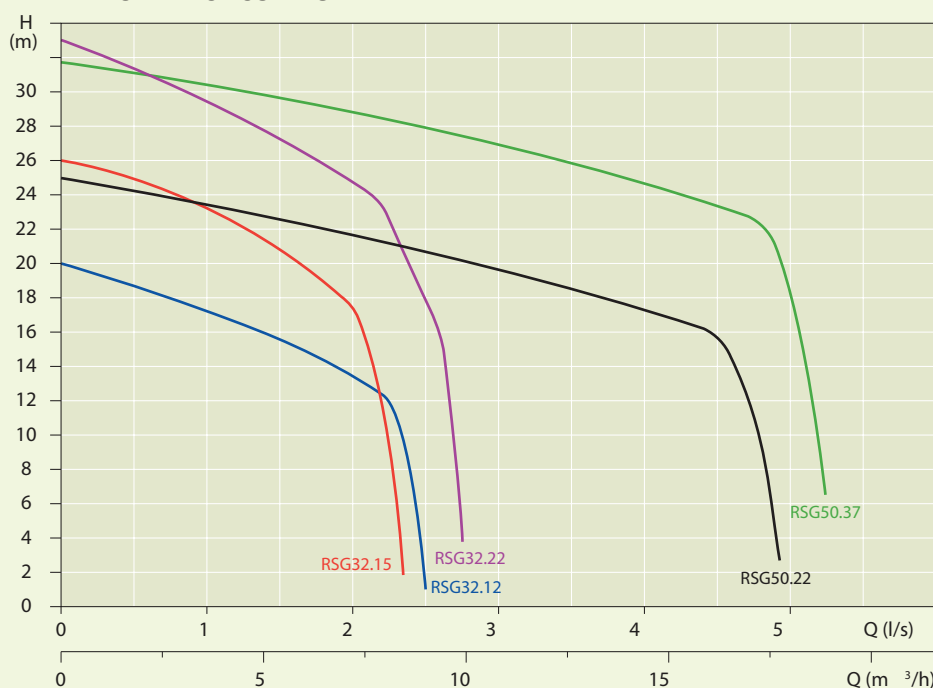

SPECIFICATIONS

Pump Model	Automatic option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSG.32.12	240v & 415v	32	1.2	8.0	4.3	2900	-	34
RSG.32.15	240v & 415v	32	1.5	9.8	3.4	2900	-	38
RSG.32.22	-	32	2.2	13.9	4.6	2900	-	36
RSG.50.22	-	50	2.2	-	5.2	2900	-	48
RSG.50.37	-	50	3.7	-	7.8	2900	-	54