




Submersible Vortex Pumps

RSV Series



Industrial and commercial wastewater applications containing soft or fibrous solids



RSV.50.075



RSV.50.04



RSVC.80.22

COMMERCIAL
KITCHENS AND
RESTAURANTS
WASHDOWN AREAS
WASTE TREATMENT
FACILITIES
LAUNDRIES
ABATTOIRS



RSVC.80.37


Remko Vortex Pumps are the ideal solution for pumping liquids with soft or fibrous solids in suspension. From residential dwellings to demanding industrial processes, Remko Vortex Pumps perform quietly and solidly every day.

Max Head: 22m



Max Flow: 37 l/sec

FEATURES

- Automatic versions available in 240v & 415v
- Non-clog impeller
- Heavy-duty construction
- Triplex seal system
- Thermal motor protection

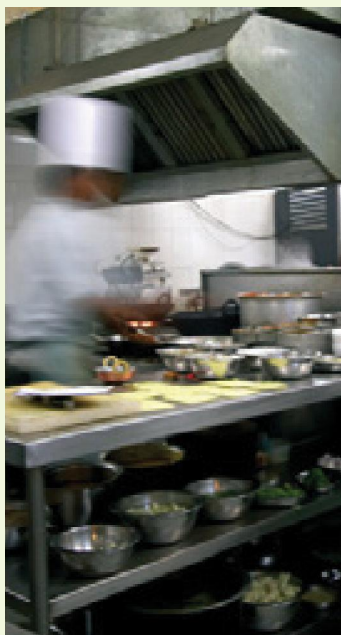

PERFORMANCE CURVES

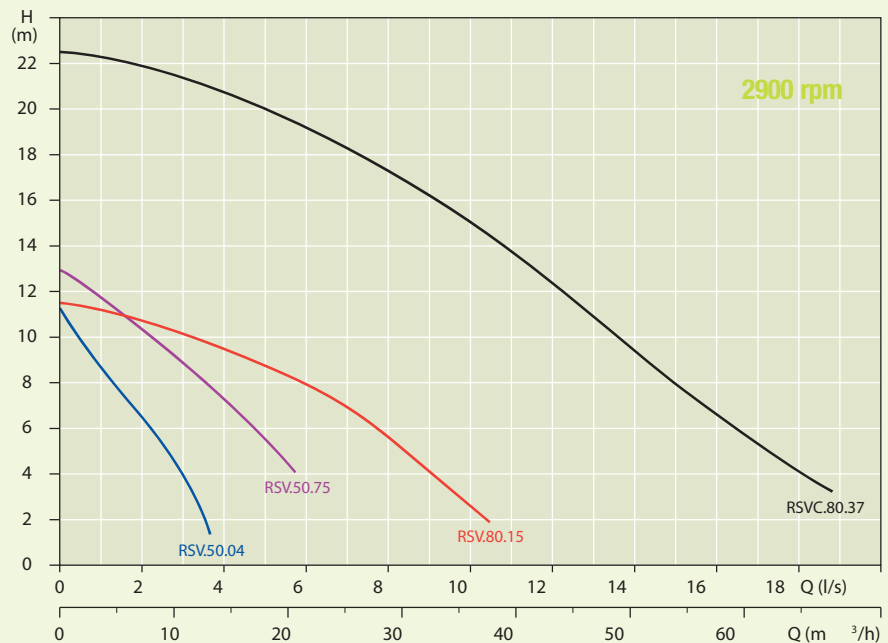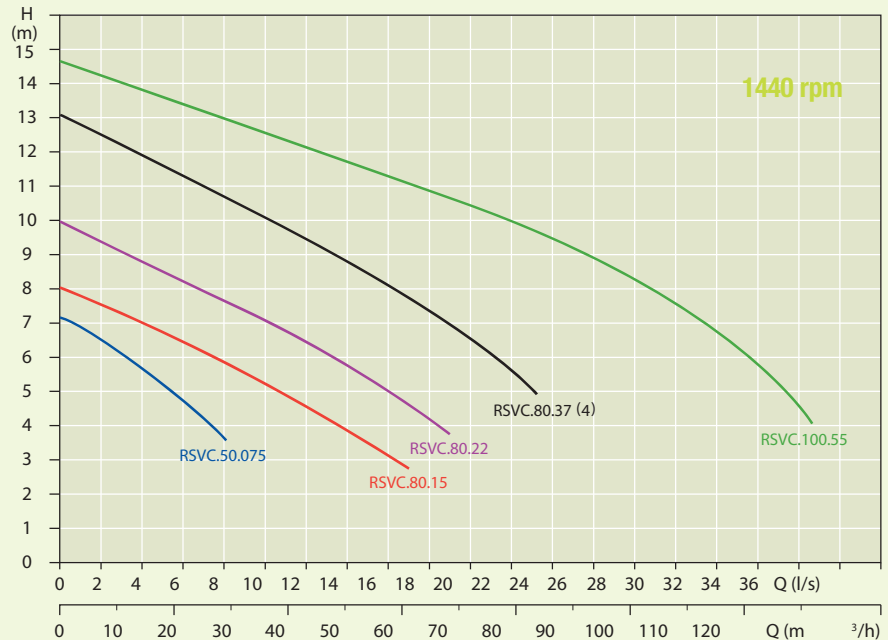

SPECIFICATIONS

Pump Model	Automatic option	Outlet (mm)	Power (kW)	Amps (240 volt)	Amps (415 volt)	Speed (rpm)	Solids Passage (mm)	Weight (kg)
RSV.50.04	240v	50	0.4	2.6	-	2900	25	12
RSV.50.075	240v & 415v	50	0.75	5.0	1.9	2900	35	18
RSVC.50.075	-	50	0.75	-	2.0	1440	50	27
RSV.80.15	240v	80	1.5	9.2	3.4	2900	20	45
RSVC.80.15	-	80	1.5	-	3.9	1440	76	60
RSVC.80.22	-	80	2.2	-	5.3	1440	76	73
RSVC.80.37	-	80	3.7	-	7.8	2900	56	58
RSVC.80.37(4)	-	80	3.7	-	8.4	1440	76	80
RSVC.100.55	-	100	5.5	-	11.8	1440	65	139