

REMKO RTH050
Heavy Duty Trash Pump



REMKO RT050

Self priming with dependable performance makes RT Series Pumps a sensible solution for industry and municipalities requiring little maintenance, resulting in significant savings of time and money.

RT Series Pumps are ideally suited for industrial applications including: steel and paper mills, abattoirs, mines, food and chemical processing plants, construction industry, dewatering, trade waste and sewage handling.



The Remko RT050 Trash Pump

PUMP SPECIFICATIONS

SPECIFICATIONS

Maximum outside dimensions. 547mm x 309mm x 523mm (length x width x height)

Weight. 98 kilograms

Impeller diameter. 158.75 millimetres

RPM. From 1150 to 2900 RPM

Solids. 44 millimetres maximum

SELF PRIMING SPECIFICATIONS

1150 RPM - 7.3 metres.


1450 RPM to 2900 RPM - 7.6 metres.

Confirm NPSH before using Curve.

Note: Specifications may change without notice

PERFORMANCE CURVE

The Performance Curve indicates Total Metres Head vs Flow Rate

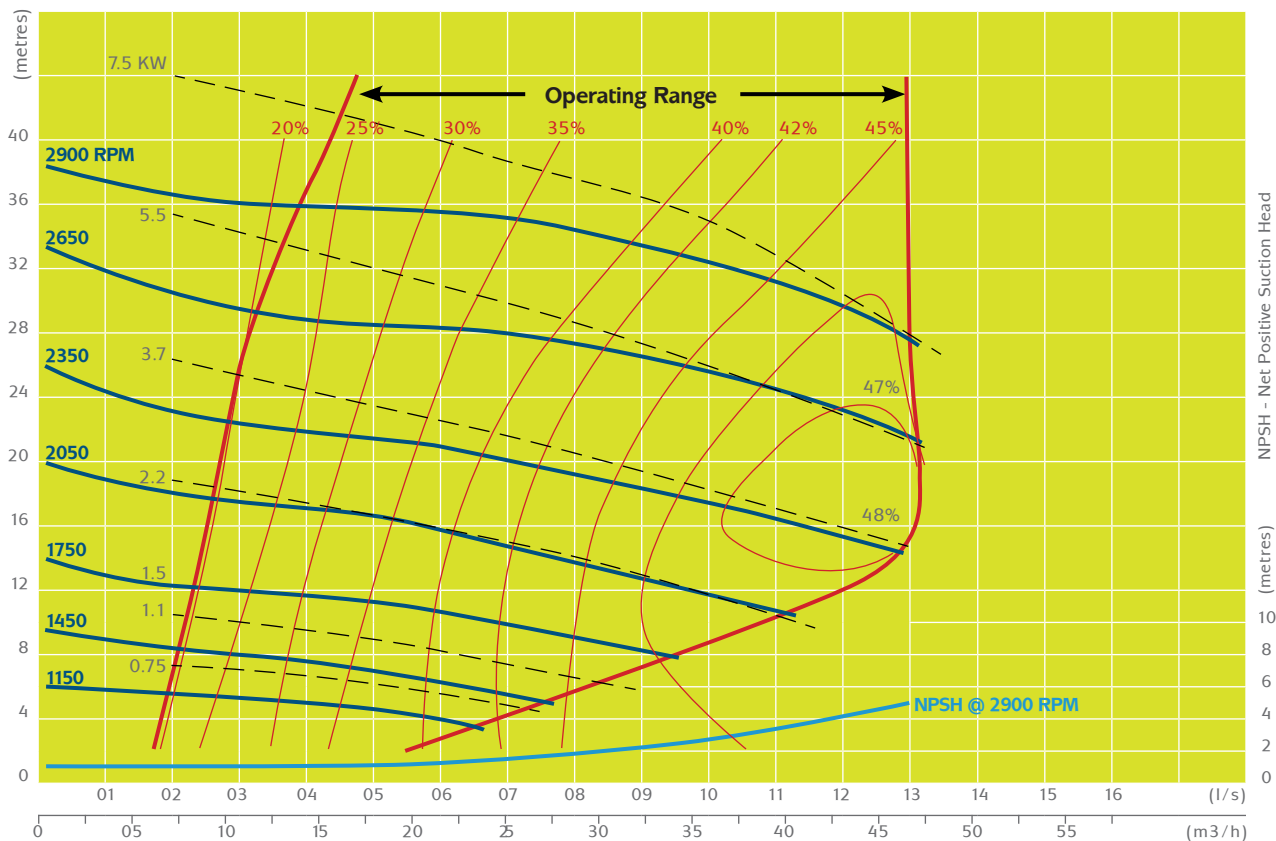

OUTSIDE DIMENSIONS RT050

50mm ANSI 150

70.0

Pump dimensions may change
without notice
All dimensions in millimetres

50mm ANSI 150

523.0mm

Ø 14.0mm

281.0mm

308.3mm

235.0mm

Maintain distance of 420mm to
remove the Rotating Assembly

318.0mm

101.6

Ø 38.1

151.5mm

54.0

163.2mm

275.0mm

547.0mm



Contact your local Remko Distributor

Remko 1800 333 424